


CHAMPION SPARK PLUGS

by Charlie Reich

*As Published in the March/April 2009 issue of SAM Speaks,
Roland Friestad, Editor*

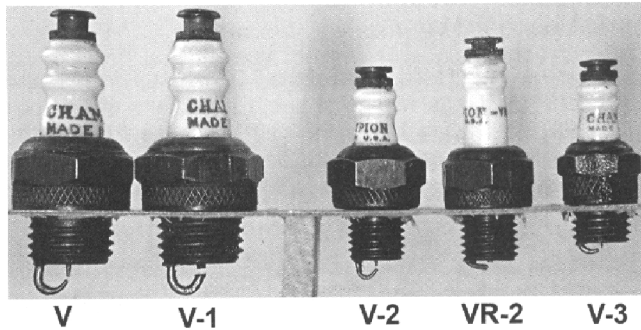

Before this information is lost to Father Time I thought it might be informative to display the differences in the original Champion spark plugs installed in the old original ignition engines.

The Champion V was the first plug offered in the first ignition engines, such as the Brown Jr. The plug had 3/8" -24 thread size plug base. The center electrode came out to a fine point. The ground (loop) terminal was .0405 dia. The wrench size is 1/2".

The Champion V-I came out in later production with a slightly larger center electrode ending in a flat tip. The ground (loop) terminal was also larger at .0415 dia. The V and the V-I can be used interchangeably

The Champion V -2 is a smaller plug, introduced with the later smaller displacement engines. The plug has a 1/4"-32 thread size base with a 7/32" thread depth. The center electrode came out to a fine point with the standard (Loop) shaped ground. The wrench size is 3/8".

The Champion VR-2 was used in the high performance engines such as the McCoy, Dooling and several others. The VR-2 uses the same metal base as the V-2 with 1/4"-32 thread size. The porcelain insulator is taller than the V -2. The center electrode was more recessed, ending in a flat tip. The ground electrode was flat (not looped) to allow clearance for the lesser head to piston clearance on these high compression engines. The wrench size is 3/8".

The Champion V -3 was the smallest size plug using a smaller base, but still utilizing the 1/4"-32 thread size with a shorter 1/8" thread depth. The wrench size is 5/16".